

DRIVEN TOOL HOLDERS

# BMT 动力刀座

品牌刀座标配滑动螺母 / 本体五年防锈 / 专用锁固扳手

最高转速: 6000rpm


本体精度: 0.003mm

转速比:  $i=1:1$

— “键” 提升  
车床精度 $5\mu$ !

专用锁固扳手


单手操作 / 方便换刀

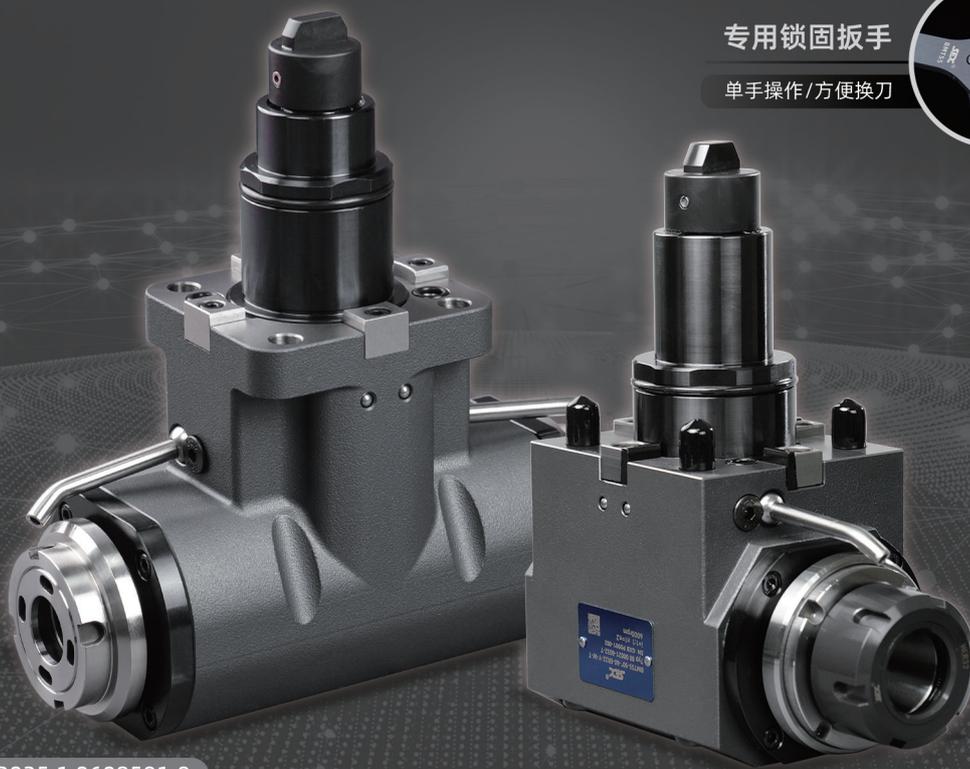

专利号: ZL 2025 1 0608591.9




型号、规格齐全

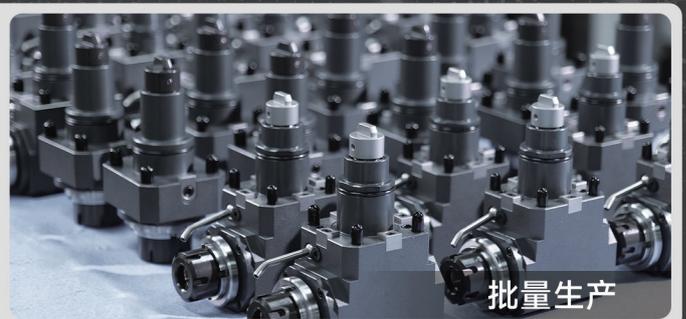

批量生产

# 外锁动力刀座参数表

0 度

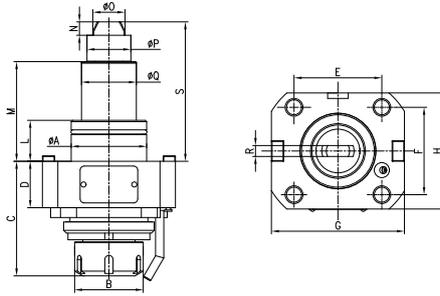


(单位: 毫米)

型号	A	B	C	D	E	F	G	H	L	M	N	O	P	Q	R	S	净重 (kg)	毛重 (kg)	库存
BMT40-0°-ER20-J-W	40	ER20	79.3	33	60	50	75	63	26	36	8	20	27	35	6	61	1.76	2.3	●
BMT40-0°-ER25-J-W	40	ER25	79.6	33	60	50	75	63	26	36	8	20	27	35	6	61	1.79	2.26	●
BMT45-0°-ER25-J-W	45	ER25	80.4	33	58	58	85	75	40	58	8	20	27	35	6	83	2.51	3.01	●
BMT55-0°-ER25-J-W	55	ER25	81	34	64	64	97	85	30	73	9.8	23.5	32	40	8	102	3.47	3.97	●
BMT55-0°-ER32-J-W	55	ER32	84	34	64	64	97	85	30	73	9.8	23.5	32	40	8	102	3.45	3.98	●
BMT65-0°-ER40-Y-W	65	ER40	88.6	37	70	73	94	94	32	82	14	28	29	45	10	111	4.06	4.77	●

● 常备库存    ● 少量库存    ○ 待投产

2026.01

90 度

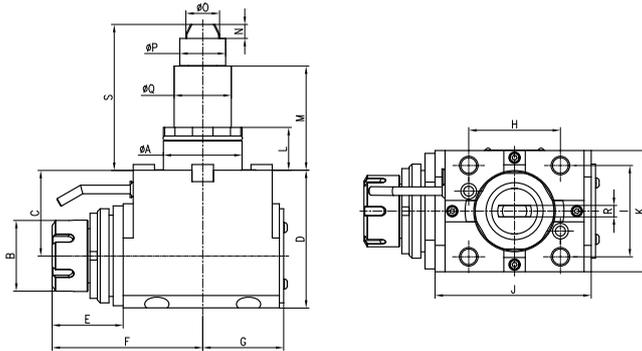

(单位: 毫米)


型号	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	净重 (kg)	毛重 (kg)	库存
BMT40-90°-60-ER20-Y-W	40	ER20	60	91.5	46.3	95.9	46	60	50	92.6	63	26	36	8	20	27	35	6	61	4.09	4.71	●
BMT40-90°-60-ER25-Y-W	40	ER25	60	91.5	46.6	96.2	46	60	50	92.6	63	26	36	8	20	27	35	6	61	4.11	4.68	●
BMT40-90°-85-ER20-Y-W	40	ER20	85	116.5	46.3	95.9	46	60	50	92.6	63	26	36	8	20	27	35	6	61	4.87	5.45	●
BMT40-90°-85-ER25-Y-W	40	ER25	85	116.5	46.6	96.2	46	60	50	92.6	63	26	36	8	20	27	35	6	61	4.92	5.48	●
BMT45-90°-60-ER25-Y-W	45	ER25	60	93.5	46.6	98.1	54.5	58	58	103	75	40	58	8	20	27	35	6	83	5.32	5.91	●
BMT45-90°-85-ER25-Y-W	45	ER25	85	118.5	46.6	98.1	54.5	58	58	103	75	40	58	8	20	27	35	6	83	5.88	6.5	●
BMT55-90°-60-ER25-Y-W	55	ER25	60	96.5	46.6	102.1	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	6.9	7.48	●
BMT55-90°-60-ER32-Y-W	55	ER32	60	96.5	49.6	105.1	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	6.97	7.59	●
BMT55-90°-70-ER25-Y-W	55	ER25	70	106.5	46.6	102.1	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	7.63	8.22	●
BMT55-90°-70-ER32-Y-W	55	ER32	70	106.5	49.6	105.1	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	7.61	8.21	●
BMT55-90°-85-ER25-Y-W	55	ER25	85	121.5	46.6	102.1	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	7.59	8.3	●
BMT55-90°-85-ER32-Y-W	55	ER32	85	121.5	49.6	105.1	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	7.61	8.32	●
BMT55-90°-100-ER32-Y-W	55	ER32	100	136.5	49.6	105.1	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	8.29	9.13	●
BMT65-90°-72-ER40-Y-W	65	ER40	72	112	51.5	103.5	59	70	73	104	94	32	77	14	28	32	45	10	111	8.45	9.23	●
BMT65-90°-85-ER40-Y-W	65	ER40	85	125	51.5	103.5	59	70	73	104	94	32	77	14	28	32	45	10	111	9.0	9.64	●
BMT65-90°-100-ER40-Y-W	65	ER40	100	140	51.5	103.5	59	70	73	104	94	32	77	14	28	32	45	10	111	9.98	10.88	●
BMT65-90°-125-ER40-Y-W	65	ER40	125	165	51.5	103.5	59	70	73	104	94	32	77	14	28	32	45	10	111	10.5	/	○

● 常备库存    ● 少量库存    ○ 待投产

2026.01

# 内锁动力刀座参数表

0 度

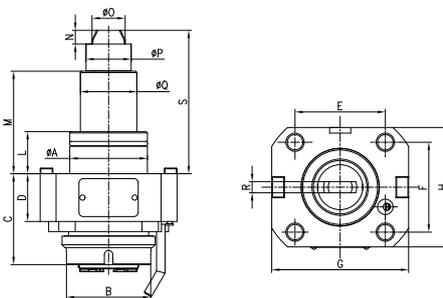

(单位: 毫米)

型号	A	B	C	D	E	F	G	H	L	M	N	O	P	Q	R	S	净重 (kg)	毛重 (kg)	库存
BMT40-0°-ER20-J-N	40	ER20	60	33	60	50	75	63	26	36	8	20	27	35	6	61	1.65	2.02	●
BMT45-0°-ER25-J-N	45	ER25	61	33	58	58	85	75	40	58	8	20	27	35	6	83	2.33	2.81	●
BMT55-0°-ER32-J-N	55	ER32	64.7	34	64	64	97	85	30	73	9.8	23.5	32	40	8	102	3.26	3.79	●
BMT65-0°-ER32-Y-N	65	ER32	67.5	37	70	73	94	94	32	82	14	28	29	45	10	111	3.8	4.38	●


●常备库存

◎少量库存

○待投产

2026.01

90 度

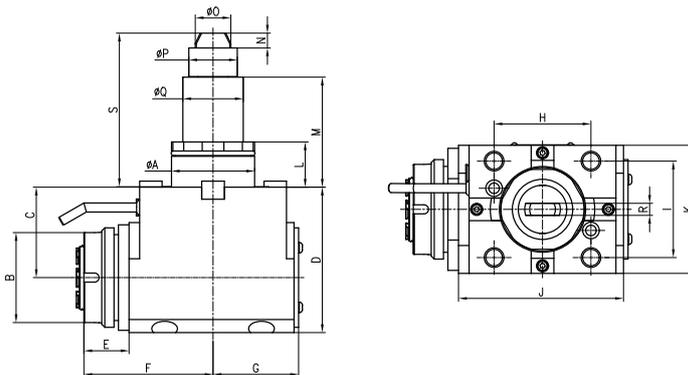

(单位: 毫米)

型号	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	净重 (kg)	毛重 (kg)	库存
BMT40-90°-60-ER20-Y-N	40	ER20	60	91.5	26.5	76.1	46	60	50	92.6	63	26	36	8	20	27	35	6	61	3.91	4.44	●
BMT40-90°-85-ER20-Y-N	40	ER20	85	116.5	26.5	76.1	46	60	50	92.6	63	26	36	8	20	27	35	6	61	4.76	5.2	●
BMT45-90°-60-ER25-Y-N	45	ER25	60	93.5	26.8	78.3	54.5	58	58	103	75	40	58	8	20	27	35	6	83	5.14	5.72	●
BMT45-90°-85-ER25-Y-N	45	ER25	85	118.5	26.8	78.3	54.5	58	58	103	75	40	58	8	20	27	35	6	83	5.69	6.2	●
BMT55-90°-60-ER32-Y-N	55	ER32	60	96.5	29.8	85.3	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	6.71	7.34	●
BMT55-90°-70-ER32-Y-N	55	ER32	70	106.5	29.8	85.3	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	7.43	7.9	●
BMT55-90°-85-ER32-Y-N	55	ER32	85	121.5	29.8	85.3	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	7.33	7.91	●
BMT55-90°-100-ER32-Y-N	55	ER32	100	136.5	29.8	85.3	56.5	64	64	109	85	30	73	9.8	23.5	32	40	8	102	8.07	8.8	◎
BMT65-90°-72-ER32-Y-N	65	ER32	72	112	30.4	82.4	59	70	73	104	94	32	77	14	28	32	45	10	111	8.16	8.8	●
BMT65-90°-85-ER32-Y-N	65	ER32	85	125	30.4	82.4	59	70	73	104	94	32	77	14	28	32	45	10	111	9.0	/	○
BMT65-90°-100-ER32-Y-N	65	ER32	100	140	30.4	82.4	59	70	73	104	94	32	77	14	28	32	45	10	111	9.7	10.46	◎
BMT65-90°-125-ER32-Y-N	65	ER32	125	165	30.4	82.4	59	70	73	104	94	32	77	14	28	32	45	10	111	10.5	/	○

●常备库存

◎少量库存


○待投产

2026.01

# 双向动力刀座参数表

内锁

90度

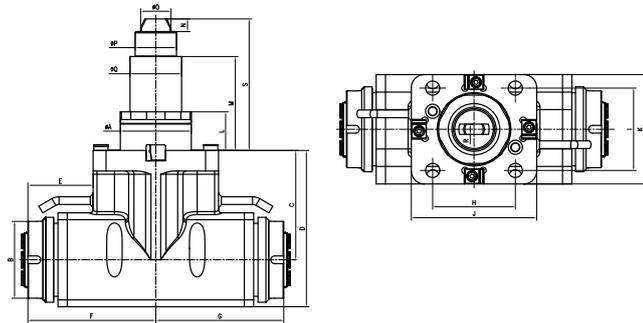

(单位: 毫米)

型号	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	净重 (kg)	毛重 (kg)	库存
BMT45-90° SC-85-ER25-J-N	45	ER25	85	118.5	52.5	94	94	58	58	83	75	40	58	8	20	27	35	6	83	6.95	7.63	●
BMT55-90° SC-85-ER32-J-N	55	ER32	85	121.5	50.5	99	99	64	64	97	85	30	73	10	23.5	32	40	8	102	8.8	9.5	●
BMT65-90° SC-100-ER32-J-N	65	ER32	100	140	47	99	99	70	73	104	94	32	77	14	28	32	45	10	111	12.7	13.44	●

● 常备库存


● 少量库存

○ 待投产

2026.01

外锁

90度

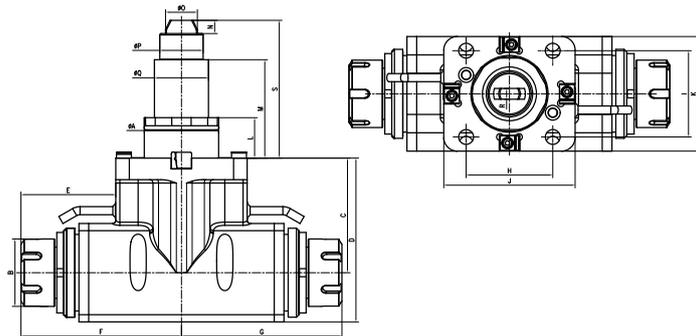

(单位: 毫米)

型号	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	净重 (kg)	毛重 (kg)	库存
BMT45-90° SC-85-ER25-J-W	45	ER25	85	118.5	72	113.5	113.5	58	58	83	75	40	58	8	20	27	35	6	83	7.31	7.99	●
BMT55-90° SC-85-ER32-J-W	55	ER32	85	121.5	70	118.5	118.5	64	64	97	85	30	73	10	23.5	32	40	8	102	/	/	○
BMT65-90° SC-100-ER32-J-W	65	ER32	100	140	66.3	118.3	118.3	70	73	104	94	32	77	14	28	32	45	10	111	/	/	○

● 常备库存

● 少量库存


○ 待投产

2026.01

# 双头动力刀座参数表

外锁

0度

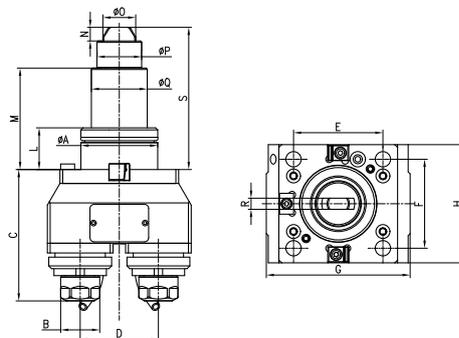

(单位: 毫米)

型号	A	B	C	D	E	F	G	H	L	M	N	O	P	Q	R	S	净重 (kg)	毛重 (kg)	库存
BMT55-0° ST-ER16-J-W-T	55	ER16	94.5	56	64	64	103	85	30	73	9.8	23.5	32	40	8	102	4.18	4.9	●

● 常备库存

● 少量库存

○ 待投产

2026.01